

S Sandberg®
ACTIVE 

Survivor Powerbank 7in1 72000


Quick guide

420-64



www.sandberg.world


Overview

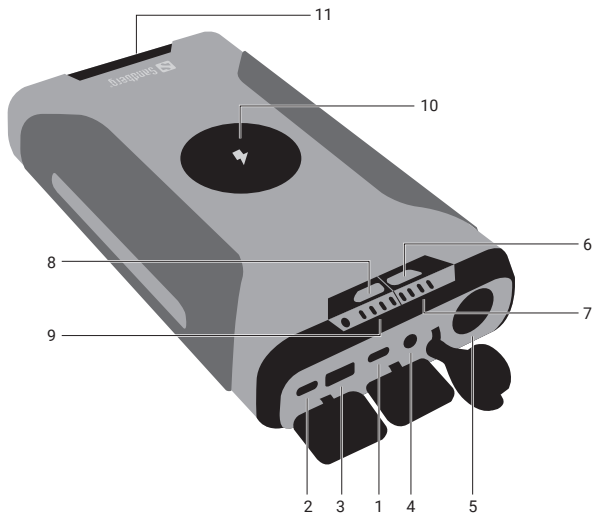


1. USB-C 1 Input/Output
2. USB-C 2 Output
3. USB-A Output
4. DC Input/Output
5. 12V Car lighter output
6. Laptop Voltage button

7. Laptop voltage indicators
8. Power button
9. Battery level indicator
10. Wireless charging Area
11. Flashlight and emergency light

Detailed specification

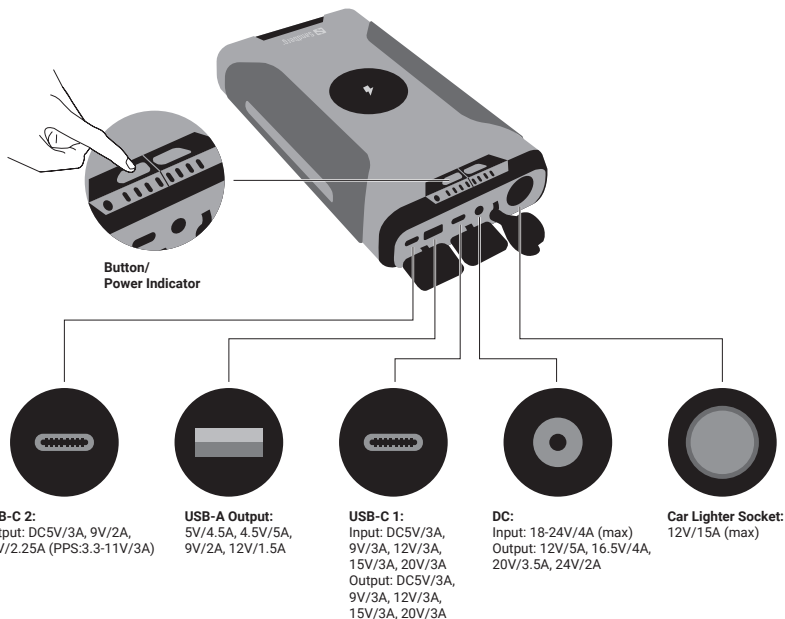

Charge the powerbank

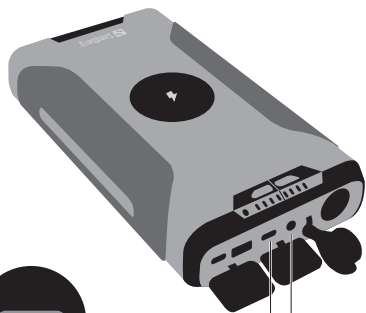

USB-C Input:
PD



DC Input:
18-24V/4A (max)

DC/PD Input




Solar Panel
Charger




Wall
Charger

Charging indicator




100% 75% 50% 25%


Charge mobile device (USB and USB-C 2 Output)

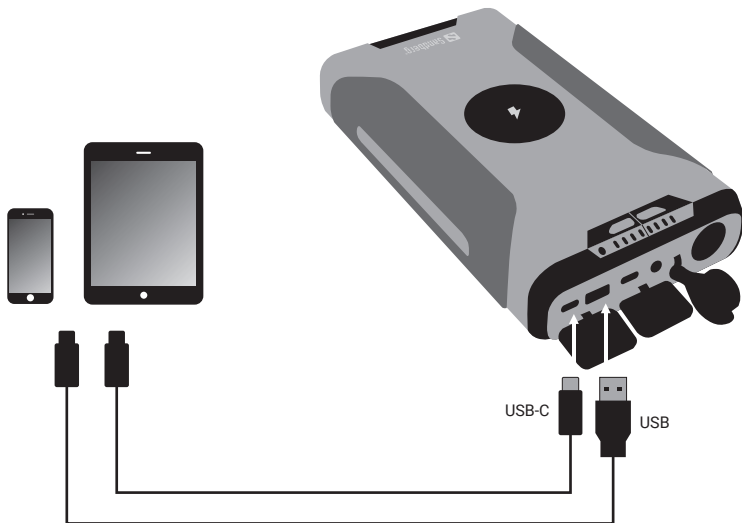

Charge equipment (Car Lighter Socket)

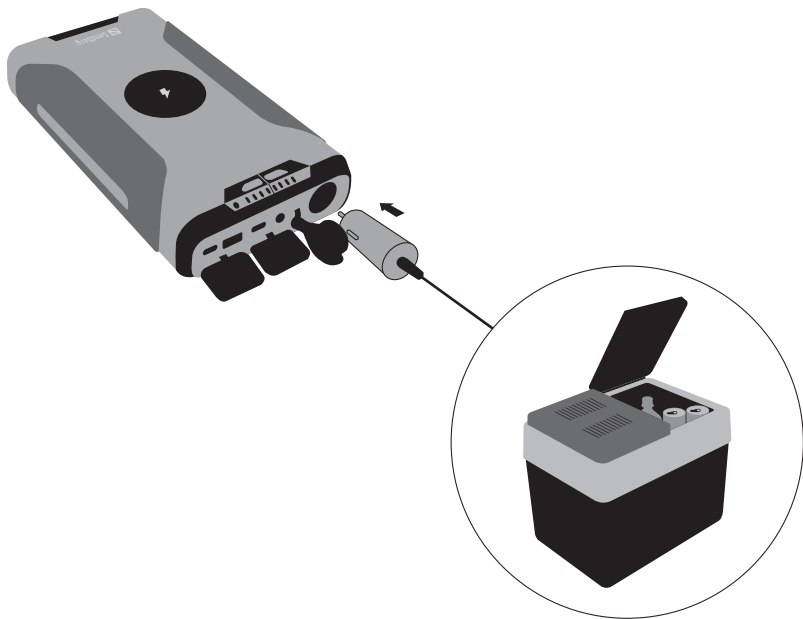


Charge laptop (DC or USB-C 1 Output)

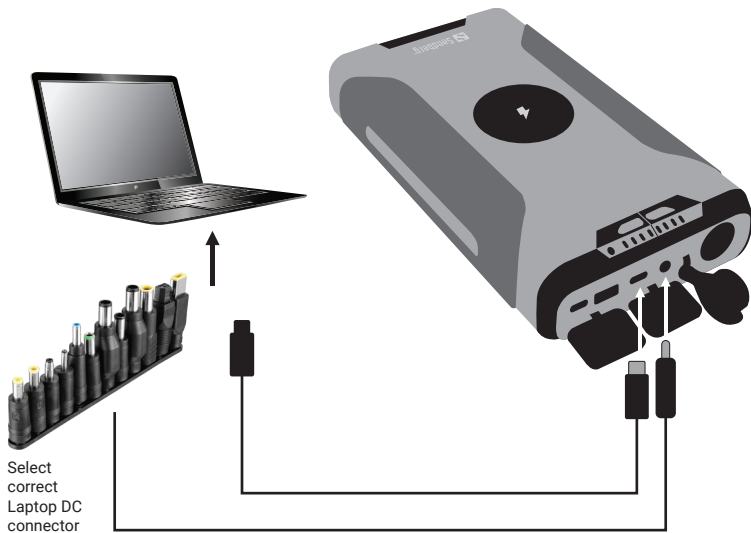

Charging a laptop with DC cable - important note

1. Choose correct tip to fit the DC port of your laptop.
2. Set the correct voltage on the power bank:
Keep long press on the button until display is flashing.

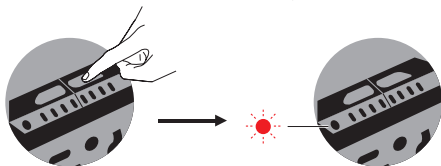


Click button short to step between Voltage 12V/16.5V/20V/24V.




3. Connect the laptop, charge will start.
4. After disconnecting the laptop, you need to set the Voltage next time.
For safety it will always start the cycle at lowest setting 12V.

NOTE: If you are in doubt on what DC-Voltage to choose, have a look at the label on the AC charger for the laptop.



Wireless charger

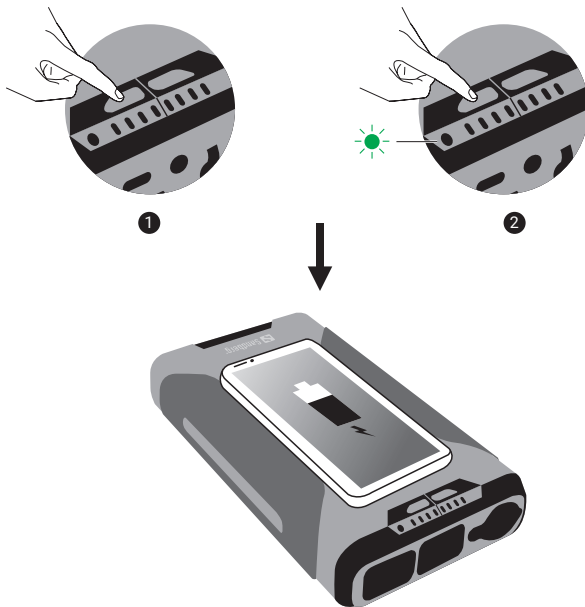


Flashlight and Emergency light




1. Long press

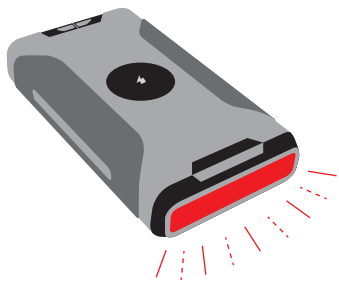



2. Long press

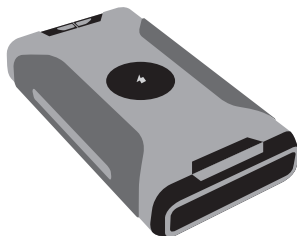



Flashlight and Emergency light




1. Press twice



2. Press once more for weak light



3. Press twice



Warranty

There is a five-year warranty on your Sandberg product. Please read the warranty terms and register your new Sandberg product at www.sandberg.world/warranty

5
Years
Warranty

Survivor Powerbank 7in1 72000

Item no. 420-64

Battery capacity: 72000 mAh (266.4 Wh)

Battery type: Li-Ion

DC-port input: 18-24V/4A (max)

DC-port output: 12V/5A, 16.5V/4A, 20V/3.5A, 24V/2A (70W max)

USB-A QC output: 5V/4.5A, 4.5V/5A, 9V/2A, 12V/1.5A

USB-C PD input 1: 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3A (60W max)

USB-C PD output 1: 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3A (60W max)

USB-C PD output 2: 5V/3A, 9V/2A, 12V/2.25A (PPS: 3.3-11V/3A)

Cigar Lighter Socket: 12V / 15A (180W max)

Wireless charger: 10W (max)

www.sandberg.world

Sandberg A/S
Bregnerødvej 133D,
3460 Birkerød, Denmark



Made in China



For information on handling electronic waste, see www.sandberg.world/weee